
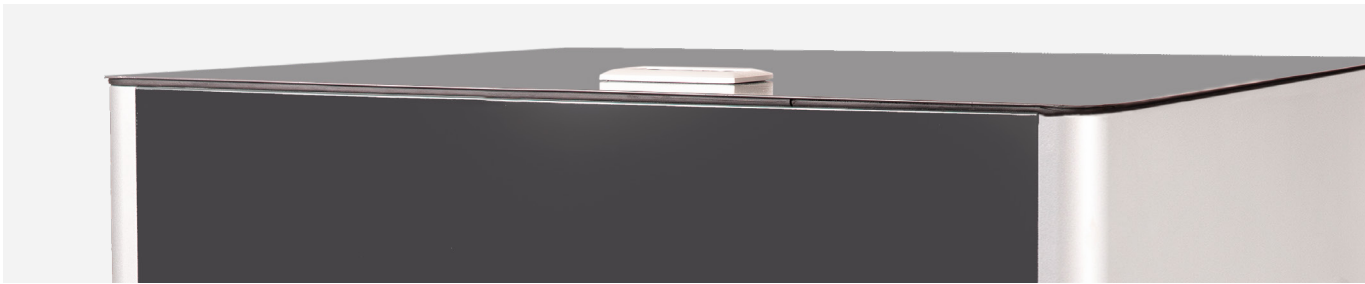


# TECHNICAL DATASHEETS

## Heat pumps

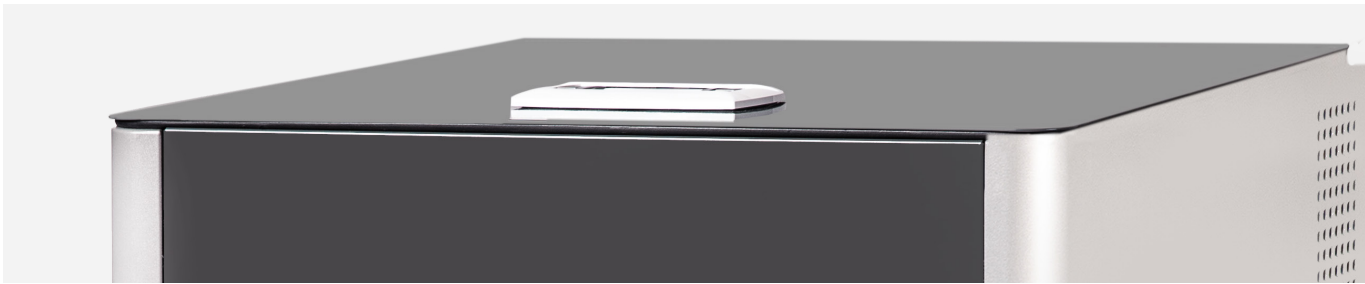

v2026\_01

GEOSMART  
NETZERO+



NetZero

# Technology for a sustainable future

The commitment to developing highly efficient renewable climate controls systems is one of the fundamental pillars of GeoSmart's history. This commitment has enabled the company to achieve numerous milestones in the sector, establishing it as a benchmark for innovation.

The NetZero+ water to water modulating heat pump ranges feature exclusive solutions and unique technologies in the market.


Although GeoSmart had already been committed to the use of low-environmental-impact refrigerants obtaining unique efficiencies, a new R454B water to water range has been successfully launched.



# Index

## Water to water

6



### NetZero<sup>+</sup>

NetZero<sup>+</sup> BW/CW

8

NetZero<sup>+</sup> HW

18





# Water to water

NetZero water to water systems have always stood out for their technological differentiation and unique efficiencies.

These units, which cover applications ranging from residential to commercial, feature Inverter modulation and optional reversible refrigeration circuit for cooling production as standard across all ranges.

Options for multi-source collection systems, integrated passive cooling, integrated heat recovery system, and many other features ensure the highest performance for each installation.



# NetZero<sup>+</sup>

Water to water heat pumps



# NetZero+ BW/CW



## Models

NetZero+ 12



NetZero+ 22



Single-phase  
230V/ac

## Options

NetZero+ BW/CW HB NetZero+ BW/CW PB NetZero+ BW/CW RB NetZero+ BW/CW BB

DHW \*  
Heating  
Pool

DHW \*  
Heating  
Pool  
Passive cooling

DHW \*  
Heating  
Pool  
Active cooling

DHW \*  
Heating  
Pool  
Passive cooling  
Active cooling

\* External DHW tank in BW models

## Services



DHW



Heating



Cooling



Pool

## Compatible systems



Heat./Cool. floor



Fancoils



Radiators

## Management of shunt groups




x1



x1



x2



x2

## Performance



Plug & Play



Min. acoustic level



HTR Technology



Lifespan

## Cascade



## Characteristics

- Modulating thermal output control across a wide range (15%–100%) and modulating flow control in both source and load circuits (20%–100%).
- R454B refrigerant (GWP 466).
- Variable speed Inverter technology.
- Compact design including source and load circulators, 2.1 gal and 3.2 gal expansion vessels for source and load respectively, safety valves for source and load circuits, and 3-way DHW diverting valve.
- High Temperature Recovery (HTR) system for DHW production up to 167 °F without auxiliary support and simultaneous production of DHW and heating/cooling.
- Integrated management of up to four different shunt groups, two buffer tanks (heating and cooling), one DHW tank, one swimming pool, and time scheduling of DHW recirculation.
- Integrated control of external auxiliary backup systems—on/off or modulating (electric heaters, boilers, etc.).
- Cascade management of up to three heat pumps.
- Integrated management of simultaneous heating/cooling production and emission systems, depending on the system layout.
- Passive cooling integrated in BW PB / CW PB and BW BB / CW BB models.
- Active cooling via cycle inversion integrated in BW RB / CW RB and BW BB / CW BB models.
- Integrated photovoltaic hybridisation.
- Integrated energy meters for monitoring electrical consumption, thermal output (heating/cooling), and instantaneous as well as seasonal efficiency monthly and annual.


# NetZero+ BW/CW 12

Water to water variable speed heat pumps with Inverter technology and R454B refrigerant


SPECIFICATIONS NetZero+ BW / CW		NetZero+ 12			
		BW HB / CW HB	BW PB / CW PB	BW RB / CW RB	BW BB / CW BB
APPLICATION	Place of installation	-	Indoor		
	Source system	-	Water loop / Ground water / Ground loop		
	DHW, Heating and Pool heating	-	■	■	■
	Integrated passive cooling	-	■	-	■
	Integrated active cooling	-	-	■	■
PERFORMANCE	Compressor modulation range	%	15 - 100		
	<sup>(2)</sup> Full load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	63.8 (3.91) / 46.1 (3.44) / 324.5 (2.92)		
	<sup>(2)</sup> Part load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	25.3 (4.26) / 21.2 (3.64) / 19.1 (3.31)		
	<sup>(2)</sup> Full load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	-	40 (13.06) / 39.5 (19.29) / 41.4 (14.85)	
	<sup>(2)</sup> Part load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	-	19.7 (14.08) / 21.8 (21.71) / 21.1 (19.31)	
	<sup>(3)</sup> Max. DHW outlet temperature without / with support	°F	145 / 176		
OPERATION LIMITS	<sup>(4)</sup> Noise power level (LWA)	dB (A)	46		
	Distribution / Set heating outlet temperature range	°F	50 - 140 / 68 - 140		
	Distribution / Set cooling outlet temperature range	°F	-	41 - 95 / 45 - 95	
	Source temperature range in heating / cooling mode	°F	-4 - 95 / 50 - 140		
	Minimum / Maximum refrigerant circuit pressure	psi	29.0 / 652.7		
	Source / Load circuit pressure range (in-built expansion vessels preload)	psi	7.3 - 43.5 (10.2) / 7.3 - 43.5 (21.8)		
	DHW tank capacity / maximum pressure	gal / psi	43.6 / 116.0 (NetZero+ CW)		
WORKING FLUIDS	R454B refrigerant load (GWP: 466)	Oz (kg)	31.7 (0.90)		
	Compressor oil type / load	Oz (kg)	POE / 41.6		
	<sup>(2)</sup> Source flow rate - Water loop / Ground water / Ground Loop	gpm	11.0 / 11.2 / 10.8		
	<sup>(2)</sup> Load flow rate - Water loop / Ground water / Ground Loop	gpm	9.7 / 9.6 / 9.7		
CONTROL ELECTRICAL DATA	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■		
	<sup>(7)</sup> Recommended external protection	-	C16A		
	Transformer primary circuit fuse	A	0.5		
	Transformer secondary circuit fuse	A	2.5		
HEAT PUMP ELECTRICAL DATA: SINGLE-PHASE VERSION	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■		
	<sup>(7)</sup> Recommended external protection	-	C50A		
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	4.0 / 19.2		
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	5.1 / 24.5		
	Maximum consumption	kW / A	8.0 / 47.0		
	<sup>(6)</sup> Minimum / Maximum starting current	A	1.9 / 10.1		
INTEGRATED SUPPORT ELECTRICAL HEATER ELECTRICAL DATA	Correction of cos Ø	-	0.96 / 1		
	<sup>(6)</sup> 3/PE 400 V / 50-60 Hz	-	■		
	<sup>(7)</sup> Recommended external protection	-	C16A		
	Maximum consumption B0W35	kW / A	4.2 / 6.2		
	Maximum consumption B0W55	kW / A	5.0 / 7.2		
DIMENSIONS & WEIGHT	Height x width x depth	inch	B: 41.4x24.0x28.2 / C: 76.5x24.0x28.5		
	Empty weight (without packaging)	lb	B: 429.9 / C: 573.2	B: 451.9 / C: 595.2	B: 429.9 / C: 573.2    B: 451.9 / C: 595.2

- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- Performance data referred to AHRI operating conditions.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp. In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.


## Dimensions and hydraulic connections

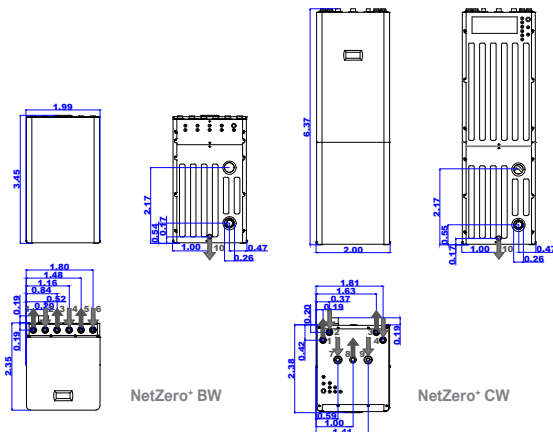


## Pressure drop

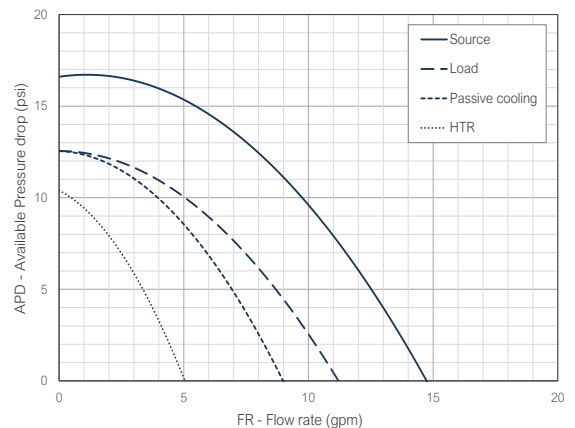


### Operational chart

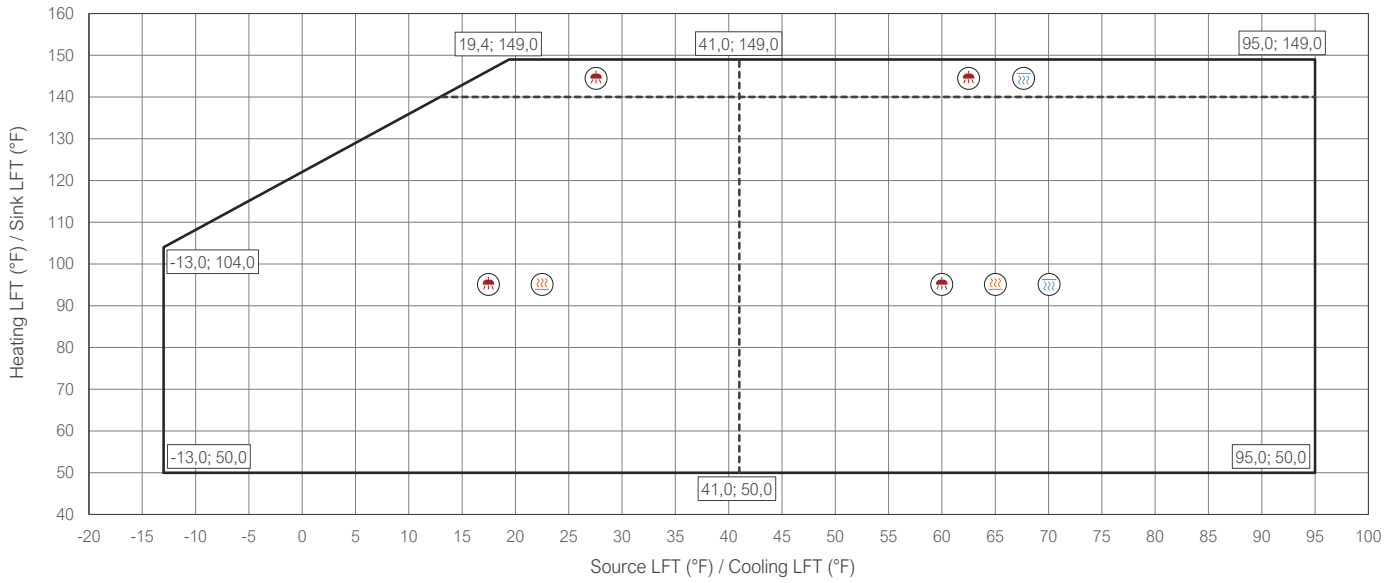

### Heating capacity - Source EFT

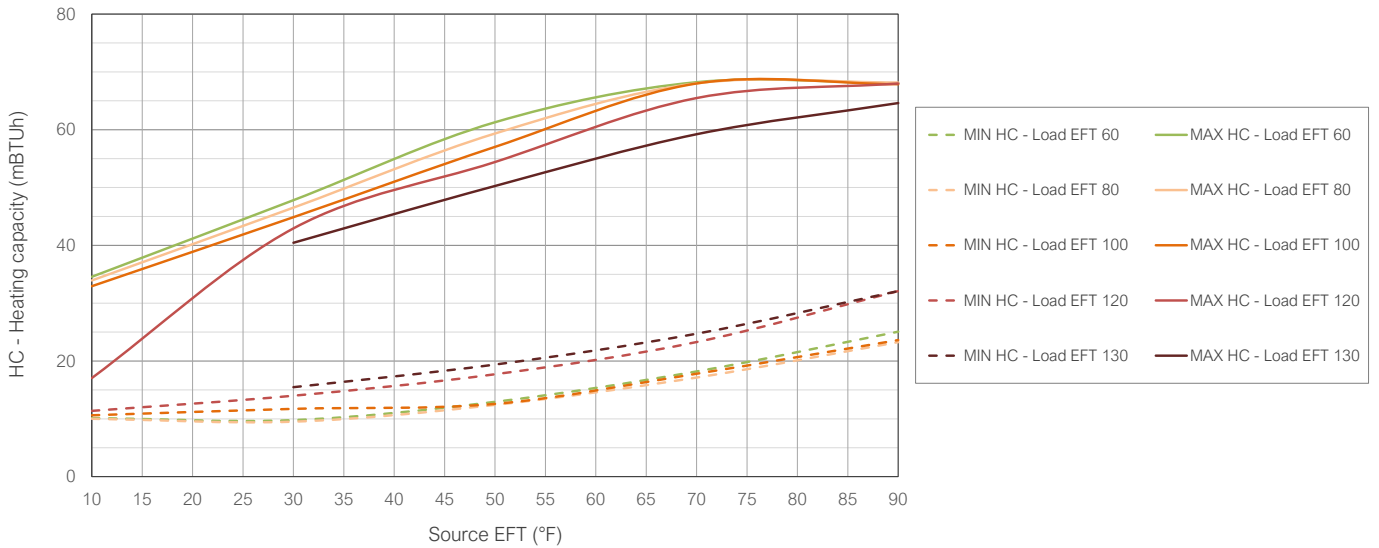

### Cooling capacity - Source EFT

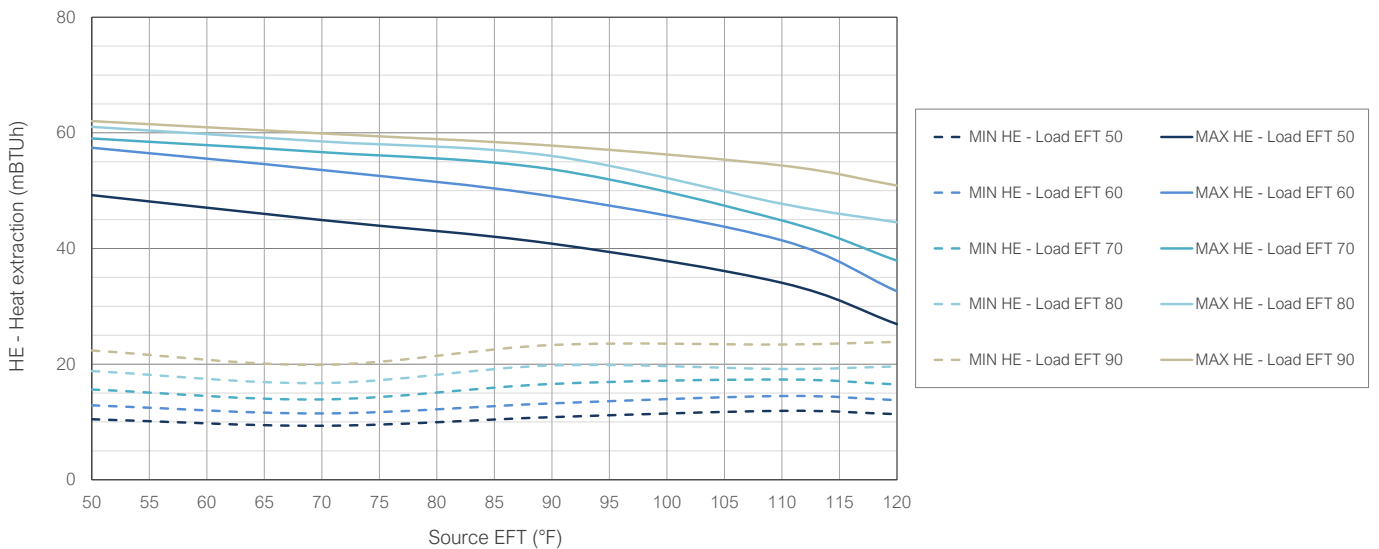

# NetZero+ BW/CW 12

## Performance data Heating

SOURCE EFT / LFT	SPEED	LOAD EFT / LFT																															
		60.0 / 78.0					80.0 / 96.2					100.0 / 116.2					120.0 / 136.2					130.0 / 146.2											
		SOURCE		LOAD			SOURCE		LOAD			SOURCE		LOAD			SOURCE		LOAD			SOURCE		LOAD									
		FR	APD	FR	APD	HE	P	HC	COP	FR	APD	FR	APD	HE	P	HC	COP	FR	APD	FR	APD	HE	P	HC	COP	FR	APD	FR	APD	HE	P	HC	COP
GPM		PSI		GPM		PSI		mBTU/h		KW		mBTU/h		KW		mBTU/h		KW		mBTU/h		KW		mBTU/h		KW		mBTU/h		KW		mBTU/h	
10.0 / 2.8	20%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	25%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	30%	2.4	16.6	1.1	12.4	7.7	0.8	10.1	3.9	2.2	16.6	1.2	12.4	6.9	0.9	10.0	3.1	2.3	16.6	1.4	12.3	7.3	1.3	11.6	2.6	2.0	16.6	1.4	12.3	6.5	1.6	11.7	2.1
	35%	2.8	16.4	1.3	12.4	9.0	0.9	11.8	4.0	2.6	16.5	1.4	12.3	8.2	1.1	11.7	3.2	3.3	16.3	2.0	12.1	10.6	1.8	16.5	2.6	2.9	16.4	2.0	12.1	9.2	2.2	16.4	2.2
	40%	3.2	16.3	1.5	12.3	10.3	1.0	13.4	4.1	2.9	16.4	1.6	12.3	9.4	1.2	13.3	3.2	2.6	16.5	1.6	12.3	8.4	1.5	13.2	2.6	2.6	16.5	1.8	12.2	8.3	2.0	14.9	2.2
	45%	3.6	16.1	1.7	12.3	11.6	1.1	15.1	4.1	3.3	16.3	1.9	12.2	10.6	1.4	15.0	3.2	3.0	16.4	1.8	12.2	9.5	1.7	14.9	2.6	2.6	16.5	1.8	12.2	8.3	2.0	14.9	2.2
	50%	4.0	15.9	1.9	12.2	12.9	1.2	16.8	4.1	3.7	16.1	2.1	12.1	11.8	1.5	16.7	3.2	3.3	16.3	2.0	12.1	10.6	1.8	16.5	2.6	2.9	16.4	2.0	12.1	9.2	2.2	16.4	2.2
	55%	4.4	15.7	2.1	12.1	14.2	1.3	18.5	4.0	4.1	15.9	2.3	12.0	13.0	1.7	18.4	3.2	3.6	16.1	2.2	12.0	11.6	2.0	18.2	2.6	-	-	-	-	-	-	-	-
	60%	4.8	15.5	2.2	12.0	15.4	1.5	20.2	4.0	4.4	15.7	2.5	11.9	14.2	1.8	20.1	3.2	4.0	16.0	2.4	12.0	12.6	2.2	19.8	2.6	-	-	-	-	-	-	-	-
	65%	5.2	15.2	2.4	12.0	16.7	1.6	21.9	4.0	4.8	15.5	2.7	11.8	15.3	2.0	21.8	3.2	4.3	15.8	2.6	11.8	13.7	2.4	21.4	2.6	-	-	-	-	-	-	-	-
	70%	5.7	14.9	2.6	11.9	18.0	1.8	23.7	3.9	5.2	15.2	2.9	11.7	16.5	2.2	23.5	3.2	4.6	15.6	2.9	11.7	14.6	2.6	23.1	2.6	-	-	-	-	-	-	-	-
75%	6.1	14.5	2.8	11.7	19.3	1.9	25.5	3.9	5.5	14.9	3.1	11.6	17.6	2.3	25.2	3.2	4.9	15.4	3.1	11.6	15.6	2.8	24.7	2.6	-	-	-	-	-	-	-	-	
80%	6.5	14.1	3.0	11.6	20.6	2.1	27.2	3.8	5.9	14.7	3.3	11.4	18.8	2.5	26.9	3.1	5.2	15.2	3.3	11.5	16.6	3.0	26.4	2.6	-	-	-	-	-	-	-	-	
85%	6.9	13.7	3.2	11.5	21.8	2.2	29.1	3.8	6.2	14.3	3.5	11.3	19.9	2.7	28.7	3.1	5.5	15.0	3.5	11.4	17.5	3.2	28.0	2.5	-	-	-	-	-	-	-	-	
90%	7.3	13.3	3.4	11.4	23.1	2.4	30.9	3.7	6.6	14.0	3.8	11.1	21.0	2.9	30.4	3.1	5.8	14.7	3.7	11.2	18.5	3.5	29.7	2.5	-	-	-	-	-	-	-	-	
95%	7.6	12.9	3.6	11.2	24.4	2.6	32.7	3.7	6.9	13.6	4.0	11.0	22.1	3.1	32.2	3.0	6.1	14.5	3.9	11.1	19.4	3.7	31.3	2.5	-	-	-	-	-	-	-	-	
100%	8.0	12.4	3.8	11.1	25.6	2.8	34.6	3.6	7.3	13.3	4.2	10.8	23.2	3.3	33.9	3.0	6.4	14.2	4.1	10.9	20.3	3.9	32.9	2.5	-	-	-	-	-	-	-	-	
30.0 / 21.0	20%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	25%	2.4	16.6	1.3	12.4	9.7	0.6	11.7	5.5	2.2	16.6	1.4	12.4	8.8	0.8	11.4	4.1	2.4	16.6	1.7	12.3	9.7	1.2	13.6	3.3	-	-	-	-	-	-	-	-
	30%	3.0	16.4	1.6	12.3	11.8	0.7	14.1	5.7	2.7	16.5	1.7	12.3	10.8	1.0	13.9	4.3	2.9	16.4	2.0	12.2	11.5	1.4	16.0	3.4	2.5	16.5	2.0	12.2	10.1	1.8	15.8	2.6
	35%	3.5	16.2	1.8	12.2	13.9	0.8	16.6	5.8	3.2	16.3	2.0	12.1	12.7	1.1	16.3	4.4	3.2	16.4	2.4	12.1	13.2	1.6	18.3	3.4	2.9	16.4	2.2	12.1	11.6	2.0	18.0	2.7
	40%	4.0	16.0	2.1	12.1	15.9	1.0	19.0	5.8	3.7	16.1	2.3	12.0	14.6	1.2	18.7	4.4	3.3	16.3	2.3	12.0	13.2	1.6	18.3	3.4	2.9	16.4	2.2	12.1	11.6	2.0	18.0	2.7
	45%	4.5	15.7	2.4	12.0	17.9	1.1	21.4	5.7	4.1	15.9	2.6	11.9	16.5	1.4	21.0	4.4	3.7	16.1	2.5	11.9	14.9	1.8	20.6	3.4	3.3	16.3	2.5	11.9	13.1	2.2	20.3	2.7
	50%	5.0	15.4	2.6	11.9	19.9	1.2	23.8	5.7	4.6	15.6	2.9	11.7	18.3	1.6	23.4	4.4	4.2	15.9	2.8	11.7	16.6	2.0	22.9	3.4	3.7	16.1	2.8	11.8	14.6	2.4	22.4	2.7
	55%	5.5	15.0	2.9	11.7	21.8	1.4	26.2	5.6	5.1	15.3	3.2	11.5	20.1	1.7	25.8	4.3	4.6	15.6	3.1	11.6	18.2	2.2	25.2	3.4	4.0	16.0	3.0	11.6	15.9	2.7	24.6	2.7
	60%	6.0	14.6	3.2	11.5	23.7	1.5	28.6	5.5	5.5	15.0	3.5	11.3	21.9	1.9	28.1	4.3	5.0	15.4	3.4	11.4	19.8	2.4	27.4	3.4	4.3	15.8	3.3	11.5	17.3	2.9	26.7	2.7
	65%	6.4	14.2	3.4	11.4	25.6	1.7	31.0	5.4	5.9	14.6	3.8	11.1	23.6	2.1	30.4	4.2	5.3	15.1	3.7	11.2	21.3	2.6	29.7	3.3	4.7	15.6	3.6	11.3	18.6	3.2	28.8	2.7
	70%	6.9	13.7	3.7	11.2	27.5	1.9	33.4	5.3	6.4	14.2	4.0	10.9	25.3	2.3	32.8	4.2	5.7	14.8	3.9	11.0	22.8	2.8	31.9	3.3	5.0	15.4	3.8	11.1	19.8	3.4	30.9	2.6
75%	7.4	13.2	4.0	11.0	29.3	2.0	35.8	5.2	6.8	13.8	4.3	10.7	27.0	2.5	35.1	4.1	6.1	14.5	4.2	10.8	24.3	3.1	34.1	3.3	5.3	15.1	4.1	10.9	21.0	3.7	33.0	2.6	
80%	7.8	12.7	4.2	10.7	31.1	2.2	38.2	5.0	7.2	13.4	4.6	10.4	28.7	2.7	37.4	4.0	6.4	14.1	4.5	10.5	25.7	3.3	36.3	3.2	5.6	14.9	4.3	10.7	22.2	4.0	35.0	2.6	
85%	8.3	12.1	4.5	10.5	32.9	2.4	40.6	4.9	7.6	12.9	4.9	10.1	30.3	2.9	39.7	4.0	6.8	13.8	4.7	10.3	27.1	3.5	38.5	3.2	5.9	14.7	4.6	10.5	23.3	4.3	37.0	2.5	
90%	8.7	11.5	4.8	10.3	34.7	2.6	43.0	4.8	8.0	12.4	5.2	9.9	31.9	3.2	42.0	3.9	7.1	13.4	5.0	10.0	28.4	3.8	40.6	3.1	6.1	14.4	4.8	10.2	24.4	4.5	39.0	2.5	
95%	9.2	10.9	5.0	10.0	36.5	2.8	45.4	4.7	8.4	11.9	5.5	9.6	33.4	3.4	44.3	3.8	7.5	13.1	5.3	9.8	29.7	4.1	42.8	3.1	6.4	14.2	5.1	10.0	25.4	4.8	41.0	2.5	
100%	9.6	10.2	5.3	9.7	38.2	3.0	47.8	4.6	8.8	11.4	5.7	9.2	34.9	3.6	46.5	3.8	7.8	12.7	5.5	9.5	31.0	4.3	44.9	3.0	6.6	14.0	5.3	9.7	26.4	5.1	42.9	2.5	
50.0 / 39.2	20%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	25%	2.9	16.4	1.7	12.3	13.7	0.6	15.5	7.9	2.6	16.5	1.8	12.2	12.4	0.8	15.0	5.6	2.3	16.6	1.8	12.2	11.1	1.0	14.5	4.1	-	-	-	-	-	-	-	-
	30%	3.5	16.2	2.1	12.1	16.5	0.7	18.7	8.0	3.2	16.3	2.2	12.0	15.1	0.9	18.1	5.7	2.8	16.4	2.2	12.1	13.6	1.2	17.6	4.2	-	-	-	-	-	-	-	-
	35%	4.0	16.0	2.4	12.0	19.3	0.8	21.9	7.9	3.7	16.1	2.6	11.9	17.8	1.1	21.3	5.8	3.4	16.3	2.5	11.9	16.1	1.4	20.6	4.3	3.0	16.4	2.5	11.9	14.1	1.8	20.1	3.2
	40%	4.6	15.6	2.8	11.8	22.0	0.9	25.1	7.8	4.3	15.8	3.0	11.6	20.4	1.2	24.4	5.7	3.9	16.0	2.9	11.7	18.4	1.6	23.6	4.3	3.4	16.2	2.8	11.7	16.3	2.1	23.0	3.3
	45%	5.2	15.2	3.1	11.6	24.7	1.1	28.2	7.7	4.8	15.5	3.4	11.4	22.9	1.4	27.4	5.7	4.3	15.8	3.3	11.5	20.8	1.8	26.6	4.3	3.8	16.0	3.2	11.5	18.4	2.3	25.8	3.3
	50%	5.7	14.8	3.5	11.3	27.4	1.2	31.3	7.5	5.3	15.1	3.8	11.1	25.4	1.6	30.5	5.6	4.8	15.5	3.6	11.2	23.0	2.0	29.5	4.3	4.3	15.8	3.5	11.3	20.4	2.6	28.6	3.3
	55%	6.3	14.3	3.8	11.1	30.0	1.4	34.4	7.3	5.8	14.7	4.1	10.8	27.8	1.8	33.5	5.5	5.3	15.1	4.0	10.9	25.2	2.2	32.5	4.2	4.7	15.6	3.9	11.0	22.3	2.8	31.4	3.3
	60%	6.8	13.8	4.2	10.8	32.5	1.5	37.5	7.1	6.3	14.3	4.5	10.5	30.1	2.0	36.5	5.4	5.7	14.8	4.4	10.6	27.4	2.5	35.3	4.2	5.1	15.3	4.2	10.8	24.2	3.1	34.1	3.2
	65%	7.3	1																														




# NetZero+ BW/CW 22

Water to water variable speed heat pumps with Inverter technology and R454B refrigerant

SPECIFICATIONS NetZero+ BW / CW		NetZero+ 22				
		BW HB / CW HB	BW PB / CW PB	BW RB / CW RB	BW BB / CW BB	
APPLICATION	Place of installation	-	Indoor			
	Source system	-	Water loop / Ground water / Ground loop			
	DHW, Heating and Pool heating	-	■	■	■	
	Integrated passive cooling	-	■	-	■	
	Integrated active cooling	-	-	■	■	
PERFORMANCE	Compressor modulation range	%	15 - 100			
	<sup>(2)</sup> Full load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	104.6 (3.87) / 85.6 (3.40) / 69.9 (2.92)			
	<sup>(2)</sup> Part load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	42.4 (5.48) / 34 (4.63) / 29.9 (4.01)			
	<sup>(2)</sup> Full load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	-	41.1 (13.07) / 46.4 (18.71) / 42.8 (15.07)		
	<sup>(2)</sup> Part load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	-	27.4 (14.98) / 30.4 (21.63) / 29.4 (19.4)		
	<sup>(3)</sup> Max. DHW outlet temperature without / with support	°F	145 / 176			
OPERATION LIMITS	<sup>(4)</sup> Noise power level (LWA)	dB (A)	46			
	Distribution / Set heating outlet temperature range	°F	50 - 140 / 68 - 140			
	Distribution / Set cooling outlet temperature range	°F	-	41 - 95 / 45 - 95		
	Source temperature range in heating / cooling mode	°F	-4 - 95 / 50 - 140			
	Minimum / Maximum refrigerant circuit pressure	psi	29.0 / 652.7			
	Source / Load circuit pressure range (in-built expansion vessels preload)	psi	7.3 - 43.5 (10.2) / 7.3 - 43.5 (21.8)			
	DHW tank capacity / maximum pressure	gal / psi	43.6 / 116.0 (NetZero+ CW)			
WORKING FLUIDS	R454B refrigerant load (GWP: 466)	Oz (kg)	47.6 (1.35)			
	Compressor oil type / load	Oz (kg)	POE / 41.6			
	<sup>(2)</sup> Source flow rate - Water loop / Ground water / Ground Loop	gpm	17.8 / 17.2 / 17.2			
	<sup>(2)</sup> Load flow rate - Water loop / Ground water / Ground Loop	gpm	13.2 / 12.8 / 12.8			
CONTROL ELECTRICAL DATA	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■			
	<sup>(7)</sup> Recommended external protection	-	C16A			
	Transformer primary circuit fuse	A	0.5			
	Transformer secondary circuit fuse	A	2.5			
HEAT PUMP ELECTRICAL DATA: SINGLE-PHASE VERSION	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■			
	<sup>(7)</sup> Recommended external protection	-	C50A			
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	6.3 / 30.3			
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	7.3 / 35.1			
	Maximum consumption	kW / A	8.0 / 47.0			
	<sup>(6)</sup> Minimum / Maximum starting current	A	1.9 / 10.1			
INTEGRATED SUPPORT ELECTRICAL HEATER ELECTRICAL DATA	Correction of cos Ø	-	0.96 / 1			
	<sup>(6)</sup> 3/PE 400 V / 50-60 Hz	-	■			
	<sup>(7)</sup> Recommended external protection	-	1 / 2 / 3			
	Maximum consumption B0W35	kW / A	C16A / C20A / C32A			
	Maximum consumption B0W55	kW / A	2.0 / 4.0 / 6.0			
DIMENSIONS & WEIGHT	Correction of cos Ø	-	8.8 / 17.6 / 26.4			
	Height x width x depth	inch	B: 41.4x24.0x28.2 / C: 76.5x24.0x28.5			
	Empty weight (without packaging)	lb	B: 429.9 / C: 573.2	B: 451.9 / C: 595.2	B: 429.9 / C: 573.2	B: 451.9 / C: 595.2


- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- Performance data referred to AHRI operating conditions.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp. In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.

## Dimensions and hydraulic connections

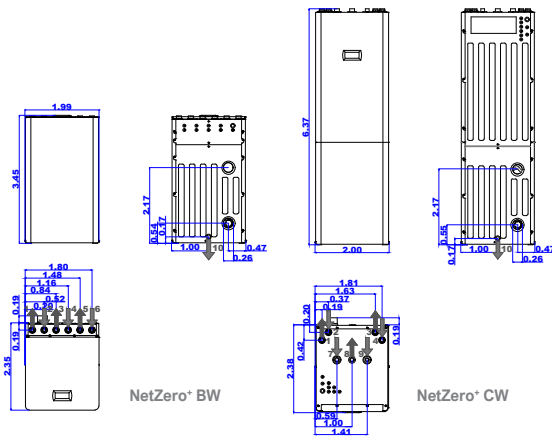


- Heating/Cooling outlet 1 1/2" M
- Heating/Cooling inlet 1 1/2" M
- Source outlet 1 1/2" M
- Source inlet 1 1/2" M
- DHW system outlet 1 1/2" M
- DHW system inlet 1 1/2" M
- CW inlet 1" F
- DHW outlet 1" F
- DHW recirculation inlet 1/2" F
- Drain 16mm


## Pressure drop

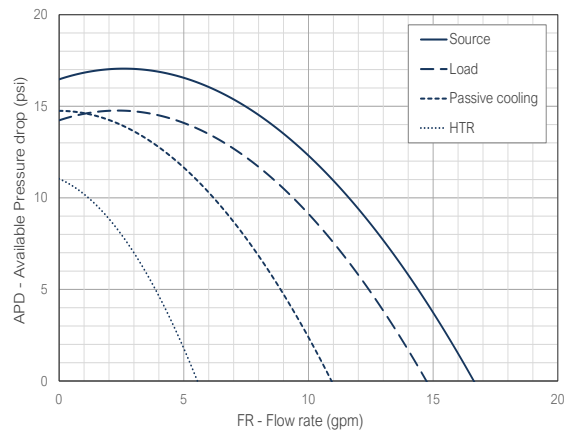


### Operational chart

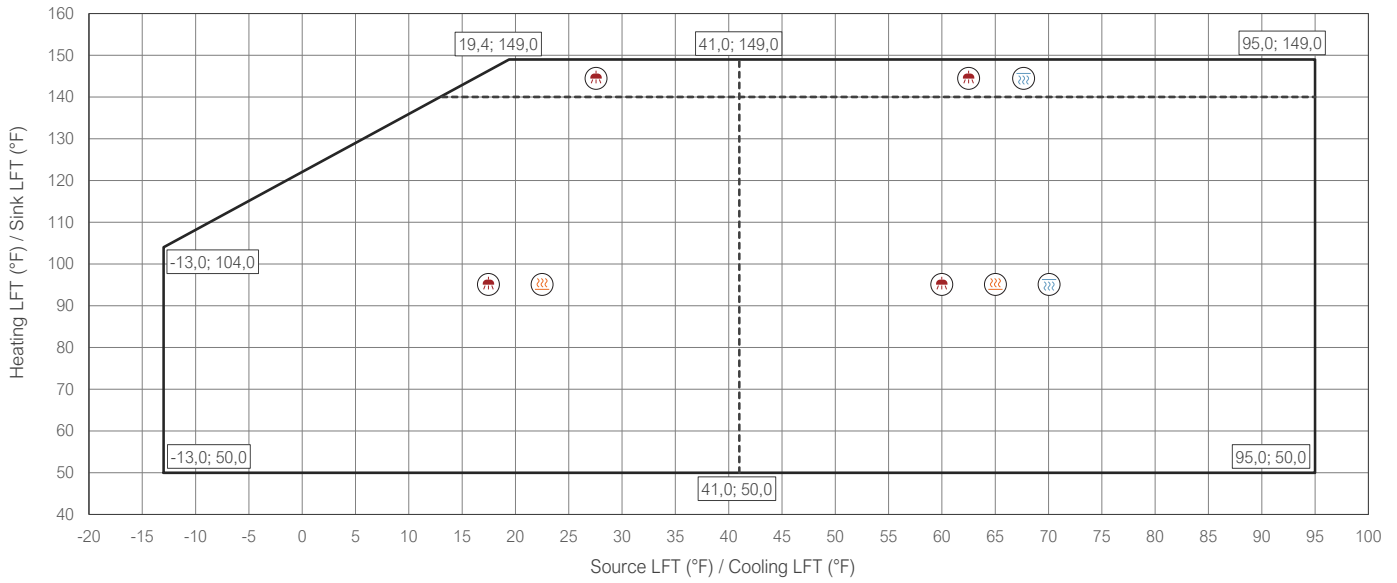

### Heating capacity - Source EFT

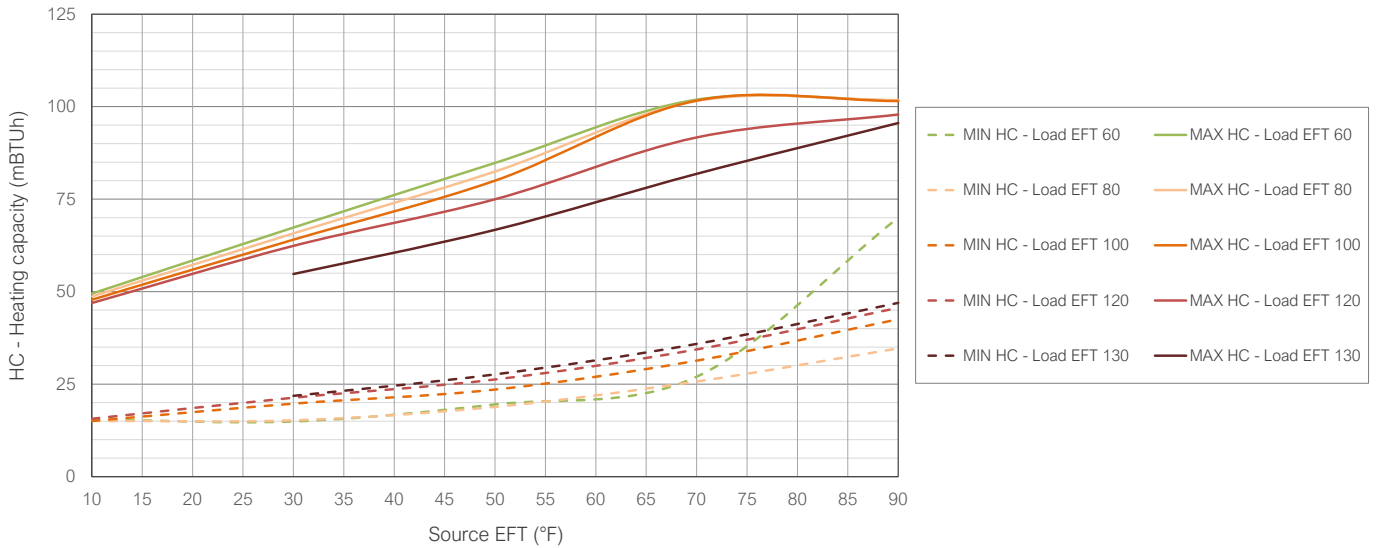

### Cooling capacity - Source EFT

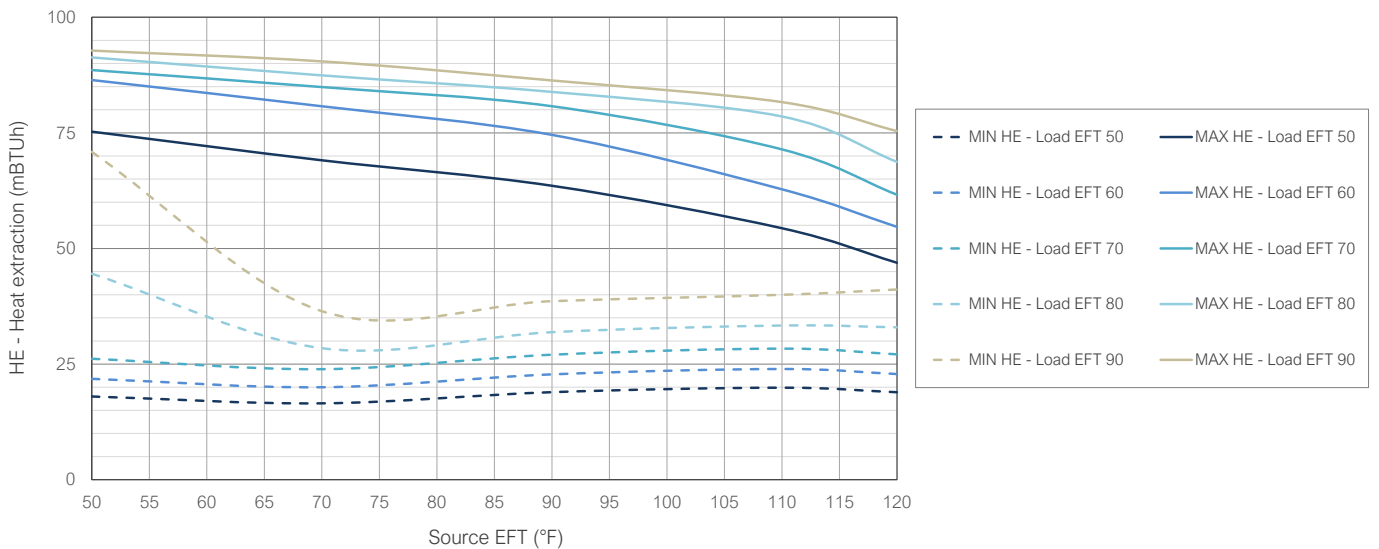





# NetZero+ HW



## Models

NetZero+ 70



NetZero+ 100



Three-Phase  
400 V / 575V

## Options

### NetZero+ HW H

- DHW \*
- Heating
- Passive cooling \*\*
- Pool

### NetZero+ HW R

- DHW \*
- Heating
- Pool
- Passive cooling \*\*
- Active cooling

\* DHW production with an external tank  
\*\* External passive cooling management

## Services



DHW



Heating



Cooling



Pool

## Compatible production systems



Heat./Cool. floor





Fancoils



Radiators

## Management of shunt groups



## Performance



Simultaneous production



Hybrid source



HTR Technology



Lifespan

## Cascade



## Characteristics

- Modulating thermal output control across a wide range (25%–100%) and modulating flow control in both source and load circuits (20%–100%).
- R454B refrigerant (GWP 466).
- Variable speed Inverter technology.
- Single scroll compressor unit.
- High Temperature Recovery (HTR) system for DHW production up to 167 °F without auxiliary support and simultaneous production of DHW and heating/cooling.
- Integrated management of up to five different shunt groups, two buffer tanks (heating and cooling), one DHW tank, one swimming pool, and time scheduling of DHW recirculation.
- Integrated control of external auxiliary backup systems—on/off or modulating (electric heaters, boilers, etc.).
- Cascade control of up to six heat pumps via cascade manager.
- Multi-source loop management via source manager.
- Integrated management of simultaneous heating/cooling production and emission systems, depending on the installation layout.
- External passive cooling management.
- Active cooling via cycle inversion integrated in HW R models.
- Available in three-phase version 400Vac and 575Vac.
- Integrated photovoltaic hybridisation.
- Integrated energy meters for monitoring electrical consumption, thermal output (heating/cooling), and instantaneous as well as seasonal efficiency—monthly and annual.


# NetZero+ HW 70

Water to water variable speed heat pumps with Inverter technology and R454B refrigerant


SPECIFICATIONS NetZero+ HW			NetZero+ 70	
			HW H	HW R
APPLICATION	Place of installation	-	Indoor	
	Source system	-	Water loop / Ground water / Ground loop	
	DHW, Heating and Pool heating	-	■	■
	External passive cooling control	-	■	■
	Integrated active cooling	-	-	■
PERFORMANCE	Compressor modulation range	%	25 - 100	
	<sup>(2)</sup> Full load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	264.2 (4.11) / 212.5 (3.53) / 168.5 (2.99)	
	<sup>(2)</sup> Part load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	114.2 (5.57) / 89.2 (4.33) / 74.5 (3.84)	
	<sup>(2)</sup> Full load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	226.1 (55.4) / 275.5 (62.5) / 256.6 (57.9)	
	<sup>(2)</sup> Part load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	99 (22.2) / 112.1 (25.3) / 107.9 (24.3)	
	<sup>(3)</sup> Max. DHW outlet temperature without / with support	°F	140 / 176	
OPERATION LIMITS	<sup>(4)</sup> Noise power level (LWA)	dB (A)	71	
	Distribution / Set heating outlet temperature range	°F	50 - 140 / 68 - 140	
	Distribution / Set cooling outlet temperature range	°F	-	41 - 95 / 45 - 95
	Source temperature range in heating / cooling mode	°F	-4 - 95 / 50 - 140	
	Minimum / Maximum refrigerant circuit pressure	psi	29.0 / 652.7	
WORKING FLUIDS	Source / Load circuit pressure range	psi	7.3 - 145.0 / 7.3 - 145.0	
	R454B refrigerant load (GWP: 466)	Oz (kg)	199.3 (5.65)	
	Compressor oil type / load	Oz (kg)	POE 160SZ / 105.8 (3.0)	
	Source flow rate - Water loop / Ground water / Ground Loop	gpm	45.3 / 34.6 / 25.6	
CONTROL ELECTRICAL DATA	Load flow rate - Water loop / Ground water / Ground Loop	gpm	58.7 / 47.2 / 37.4	
	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C1A	
	Transformer primary circuit fuse	A	0.63	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION - 400Vac	Transformer secondary circuit fuse	A	4.0	
	<sup>(6)</sup> 3/PE 380-480V / 50-60Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C50A	
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	13.9 / 21.8	
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	19.3 / 30.2	
	Maximum consumption	kW / A	18.5 / 42.6	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION - 575Vac	<sup>(6)</sup> Minimum / Maximum starting current	A	7.0 / 24.0	
	Correction of cos Ø	-	0.96 / 1	
	<sup>(6)</sup> 3/PE 525-600V / 50-60Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C63A	
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	13.9 / 15.1	
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	19.3 / 21.0	
DIMENSIONS & WEIGHT	Maximum consumption	kW / A	37.0 / 49.0	
	<sup>(6)</sup> Minimum / Maximum starting current	A	4.9 / 16.7	
DIMENSIONS & WEIGHT	Correction of cos Ø	-	0.96 / 1	
	Height x width x depth	inch	42.3 x 34.6 x 31.1	
DIMENSIONS & WEIGHT	Empty weight (without packaging)	lb	709.9	740.8

- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- Performance data referred to AHRI operating conditions.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp. In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.


## Dimensions and hydraulic connections

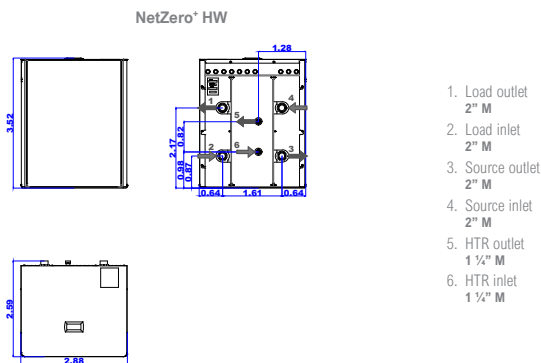


## Pressure drop

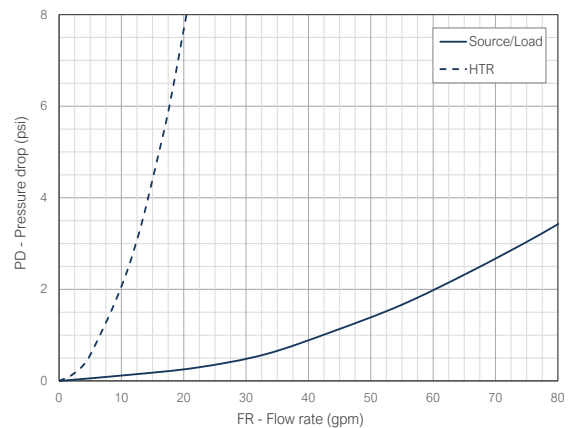


### Operational chart

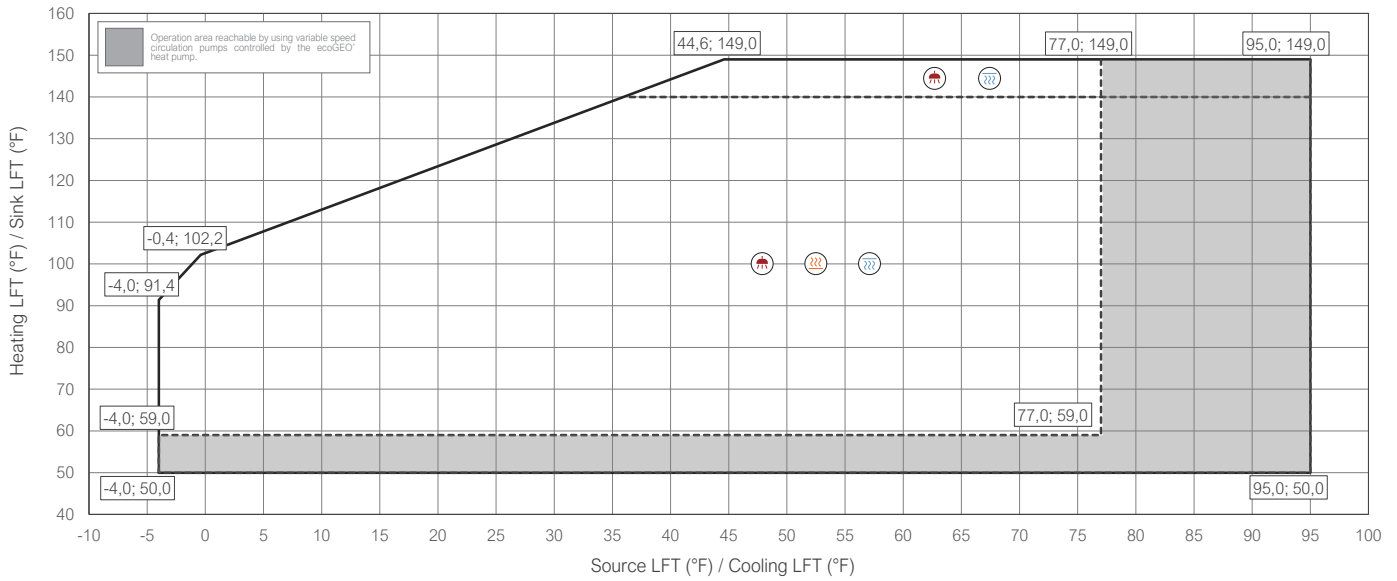

### Heating capacity - Source EFT

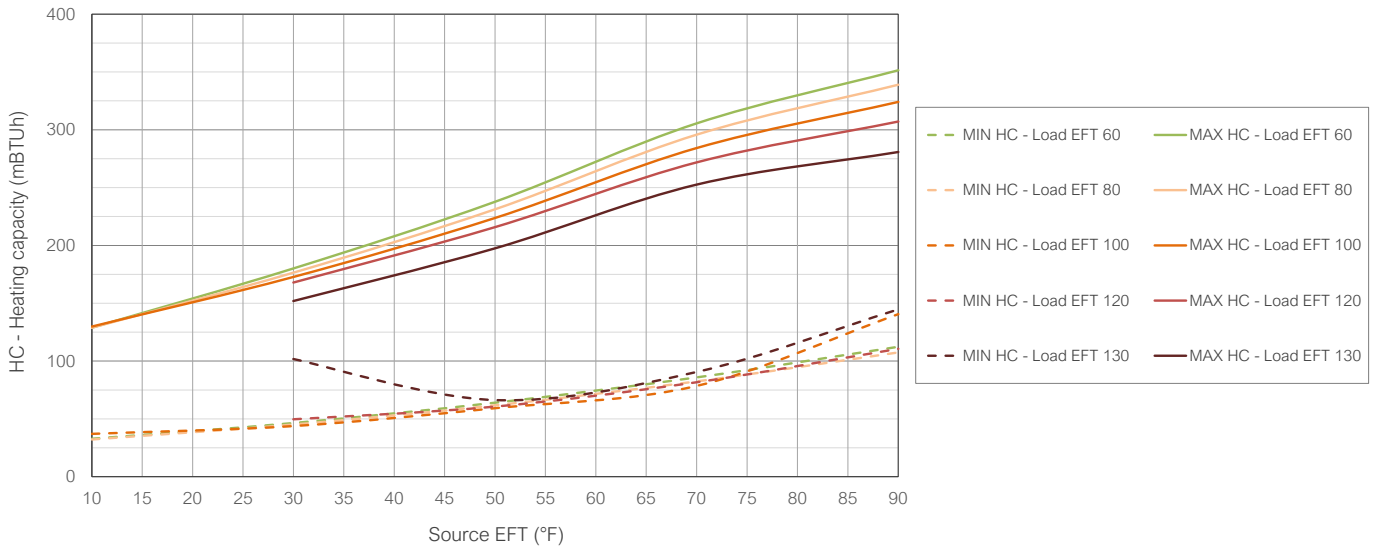

### Cooling capacity - Source EFT

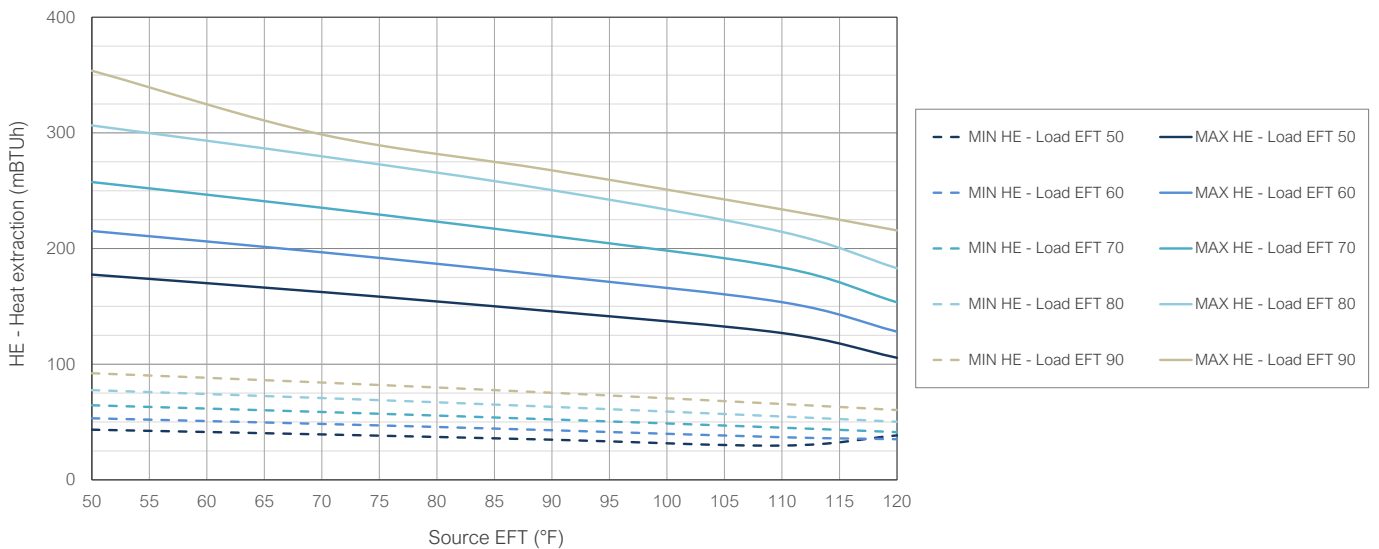



# NetZero+ HW 70

## Performance data Cooling

SOURCE EFT/LFT	SPEED	LOAD EFT / LFT																																																											
		50.0 / 41.0												60.0 / 49.2												70.0 / 59.2												80.0 / 67.4												90.0 / 77.4											
		SOURCE						LOAD						SOURCE						LOAD						SOURCE						LOAD						SOURCE						LOAD																	
		FR	PD	FR	PD	HC	P	HE	EER	FR	PD	FR	PD	HC	P	HE	EER	FR	PD	FR	PD	HC	P	HE	EER	FR	PD	FR	PD	HC	P	HE	EER	FR	PD	FR	PD	HC	P	HE	EER	FR	PD	FR	PD	HC	P	HE	EER												
50.0 / 62.6	20%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-														
	25%	8.8	0.06	9.7	0.08	48.9	1.7	43.4	25.5	10.4	0.09	9.9	0.08	58.2	1.5	53.3	35.1	12.3	0.11	11.9	0.11	68.5	1.3	64.5	50.9	14.4	0.15	12.3	0.11	80.5	0.9	77.5	83.7	16.8	0.19	14.6	0.15	93.7	0.5	92.2	184.0																				
	30%	10.7	0.09	11.7	0.10	59.4	2.1	52.7	25.4	12.7	0.12	12.0	0.11	70.6	1.9	64.6	34.6	14.9	0.16	14.5	0.15	83.2	1.6	78.2	49.4	17.5	0.20	14.9	0.15	97.7	1.2	94.0	79.1	20.4	0.27	17.7	0.21	113.6	0.7	111.6	162.4																				
	35%	12.5	0.12	13.8	0.14	69.9	2.5	61.9	24.9	14.9	0.15	14.1	0.14	83.2	2.3	75.9	33.6	17.6	0.21	17.0	0.19	97.9	1.9	91.7	47.2	20.6	0.27	17.5	0.20	114.9	1.5	110.2	73.1	24.0	0.36	20.8	0.28	133.6	0.9	130.7	138.1																				
	40%	14.4	0.15	15.8	0.17	80.5	2.9	71.1	24.4	17.2	0.20	16.1	0.18	95.7	2.7	87.1	32.4	20.2	0.26	19.5	0.25	112.7	2.4	105.2	44.7	23.7	0.35	20.0	0.26	132.1	1.9	126.2	67.0	27.5	0.46	23.8	0.35	153.6	1.3	149.7	117.2																				
	45%	16.3	0.18	17.8	0.21	91.1	3.4	80.2	23.7	19.4	0.24	18.2	0.22	108.3	3.2	98.2	31.2	22.9	0.33	22.0	0.30	127.4	2.8	118.5	42.2	26.8	0.44	22.6	0.32	149.4	2.3	142.1	61.4	31.1	0.57	26.7	0.43	173.5	1.7	168.4	100.2																				
	50%	18.3	0.22	19.9	0.25	101.8	3.9	89.3	23.1	21.7	0.30	20.2	0.26	120.9	3.6	109.2	29.9	25.5	0.40	24.4	0.37	142.2	3.3	131.7	39.9	29.9	0.53	25.1	0.39	166.6	2.8	157.9	56.3	34.7	0.70	29.7	0.53	193.5	2.2	186.9	86.8																				
	55%	20.2	0.26	21.9	0.30	112.5	4.4	98.4	22.4	23.9	0.36	22.3	0.31	133.5	4.2	120.2	28.7	28.2	0.48	26.8	0.44	157.0	3.8	144.8	37.7	33.0	0.64	27.5	0.46	183.9	3.3	173.4	51.8	38.3	0.84	32.6	0.62	213.4	2.7	205.2	76.0																				
	60%	22.1	0.31	23.9	0.35	123.2	4.9	107.3	21.7	26.2	0.42	24.3	0.36	146.2	4.7	131.0	27.6	30.8	0.56	29.2	0.51	171.8	4.4	157.8	35.6	36.1	0.75	30.0	0.54	201.2	3.9	188.8	47.8	41.9	1.00	35.4	0.73	233.4	3.3	223.2	67.3																				
	65%	24.0	0.36	25.8	0.41	134.0	5.5	116.3	21.1	28.5	0.49	26.3	0.42	158.9	5.4	141.8	26.5	33.5	0.66	31.6	0.59	186.7	5.1	170.7	33.7	39.2	0.88	32.4	0.62	218.5	4.6	204.1	44.3	45.4	1.16	38.3	0.84	253.3	4.0	241.1	60.3																				
	70%	26.0	0.41	27.8	0.47	144.8	6.1	125.2	20.5	30.8	0.56	28.3	0.48	171.7	6.0	152.6	25.5	36.2	0.76	34.0	0.67	201.6	5.7	183.4	32.0	42.3	1.01	34.8	0.70	235.8	5.3	219.2	41.2	49.0	1.34	41.1	0.96	273.3	4.8	258.7	54.4																				
75%	27.9	0.47	29.8	0.53	155.7	6.8	134.0	19.8	33.1	0.64	30.2	0.54	184.4	6.7	163.2	24.5	38.8	0.86	36.3	0.76	216.5	6.4	196.1	30.4	45.4	1.16	37.2	0.80	253.1	6.1	234.1	38.5	52.6	1.53	43.8	1.09	293.2	5.6	276.2	49.5																					
80%	29.9	0.53	31.7	0.59	166.6	7.4	142.8	19.3	35.4	0.73	32.2	0.61	197.3	7.4	173.7	23.6	41.5	0.98	38.6	0.86	231.4	7.2	208.6	28.9	48.5	1.31	39.5	0.89	270.4	6.9	248.9	36.0	56.2	1.74	46.6	1.22	313.2	6.5	296.4	45.3																					
85%	31.8	0.60	33.7	0.66	177.5	8.1	151.6	18.7	37.7	0.82	34.1	0.68	210.1	8.1	184.2	27.9	44.2	1.10	40.9	0.95	246.3	8.0	221.0	27.6	51.6	1.48	41.8	0.99	287.8	7.8	265.0	33.9	59.7	1.95	49.3	1.35	333.1	7.4	310.4	41.8																					
90%	33.8	0.67	35.6	0.74	188.5	8.8	160.3	18.2	40.0	0.91	36.0	0.75	223.0	8.9	194.6	21.9	46.9	1.23	43.2	1.06	261.3	8.9	233.3	26.3	54.7	1.65	44.1	1.10	305.1	8.7	278.0	31.9	63.7	2.18	52.0	1.50	353.1	8.5	327.3	38.7																					
95%	35.8	0.74	37.5	0.81	199.6	9.6	168.9	17.6	42.3	1.02	38.0	0.83	235.9	9.7	204.9	21.1	49.5	1.37	45.5	1.16	276.3	9.8	245.5	25.2	57.8	1.84	46.4	1.21	322.4	9.7	292.3	30.2	66.9	2.43	54.6	1.65	373.0	9.5	343.9	36.0																					
100%	37.8	0.82	39.5	0.89	210.6	10.4	177.5	17.2	44.6	1.12	39.9	0.91	248.8	10.6	215.2	20.4	52.2	1.51	47.7	1.27	291.3	10.7	257.5	24.1	60.9	2.03	48.7	1.32	339.8	10.7	306.4	28.6	-	-	-	-	-	-	-	-																					
70.0 / 82.6	20%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-														
	25%	8.5	0.06	8.7	0.06	47.4	2.5	39.3	15.7	10.1	0.08	9.0	0.07	56.1	2.4	48.4	20.3	11.8	0.10	10.9	0.09	65.9	2.2	58.7	26.3	13.8	0.14	11.2	0.10	77.1	2.0	70.7	35.4	16.1	0.18	13.4	0.13	89.5	1.7	84.1	49.8																				
	30%	10.3	0.08	10.6	0.09	57.5	3.0	47.9	16.0	12.2	0.11	10.9	0.09	68.1	2.9	58.8	20.4	14.3	0.14	13.2	0.13	79.9	2.7	71.2	26.3	16.8	0.19	13.6	0.13	93.5	2.4	85.7	35.0	19.5	0.25	16.2	0.18	108.5	2.1	101.8	48.5																				
	35%	12.1	0.11	12.5	0.12	67.7	3.5	56.4	16.1	14.4	0.15	12.8	0.12	80.1	3.4	69.2	20.3	16.9	0.19	15.5	0.17	94.0	3.2	83.7	25.9	19.7	0.25	16.0	0.17	110.0	3.0	100.5	34.0	22.9	0.33	18.9	0.23	127.5	2.6	119.3	46.3																				
	40%	14.0	0.14	14.4	0.15	77.9	4.1	64.8	16.0	16.5	0.18	14.7	0.15	92.2	4.0	79.5	20.1	19.4	0.24	17.8	0.21	108.1	3.8	96.0	25.3	22.7	0.32	18.3	0.22	126.4	3.5	115.2	32.8	26.3	0.42	21.7	0.30	146.4	3.1	136.6	43.9																				
	45%	15.8	0.17	16.3	0.18	88.2	4.6	73.2	15.8	18.7	0.23	16.6	0.19	104.3	4.6	89.7	19.7	21.9	0.30	20.0	0.26	122.3	4.4	108.2	24.7	25.6	0.40	20.6	0.27	142.8	4.1	129.7	31.6	29.7	0.53	24.4	0.37	165.4	3.7	153.7	41.4																				
	50%	17.7	0.21	18.1	0.22	98.4	5.2	81.6	15.6	20.9	0.28	18.5	0.22	116.4	5.2	99.8	19.3	24.5	0.37	22.3	0.31	136.4	5.0	120.3	23.9	28.6	0.49	22.9	0.33	159.3	4.8	144.1	30.3	33.1	0.64	27.1	0.44	184.4	4.4	170.6	39.0																				
	55%	19.5	0.25	20.0	0.26	108.8	5.9	89.9	15.4	23.1	0.33	20.3	0.27	128.6	5.8	109.9	18.8	27.0	0.44	24.5	0.37	150.6	5.7	132.3	23.2	31.5	0.59	25.1	0.39	175.7	5.5	158.4	29.0	36.5	0.77	29.7	0.53	203.3	5.1	187.3	36.8																				
	60%	21.4	0.29	21.8	0.30	119.1	6.5	98.2	15.1	25.2	0.39	22.2	0.31	140.8	6.5	119.8	18.4	29.6	0.52	26.7	0.43	164.8	6.4	144.2	22.4	34.5	0.69	27.4	0.45	192.2	6.2	172.5	27.8	39.9	0.91	32.3	0.62	222.3	5.9	203.8	34.7																				
	65%	23.2	0.34	23.6	0.35	129.6	7.2	106.4	14.8	27.4	0.46	24.0	0.36	153.0	7.2	129.7	17.9	32.1	0.61	28.9	0.50	179.0	7.2	156.0	21.7	37.4	0.81	29.6	0.52	200.7	7.0	186.4	26.6	43.3	1.06	34.9	0.71	241.2	6.7	220.1	32.8																				
	70%	25.1	0.39	25.5	0.40	140.0	7.9	114.6	14.5	29.6	0.52	25.8	0.41	165.2	8.0	136.6	17.5	34.6	0.70	31.1	0.57	193.2	8.0	167.7	21.0	40.4	0.93	31.8	0.60	225.1	7.9	200.2	25.5	46.6	1.22	37.5	0.81	260.1	7.6	236.2	31.0																				
75%	27.0	0.44	27.3	0.45	150.5	8.7	122.7	14.2	31.8	0.60	27.7	0.46	177.5	8.8	149.3	17.0	37.2	0.80	33.2	0.65	207.4	8.8	179.2	20.3	43.3	1.06	33.9	0.67	241.6	8.8	213.8	24.4	50.0	1.39	40.0	0.91	279.0	8.6	252.1	29.4																					
80%	28.9	0.50	29.1	0.51	161.0	9.4	130.7	13.9	34.0	0.68	29.4	0.52	189.7	9.6	159.0	16.6	39.7	0.90	35.3	0.72	221.6	9.7	190.7	19.7	46.3	1.20	36.1	0.75	258.0	9.7	227.3	23.4	53.4	1.58	42.5	1.02	297.9	9.6	267.8	27.9																					
85%	30.8	0.56	3																																																										


# NetZero+ HW 100

Water to water variable speed heat pumps with Inverter technology and R454B refrigerant

SPECIFICATIONS ecoGEO+ HW			NetZero+ 100	
			HW H	HW R
APPLICATION	Place of installation	-	Indoor	
	Source system	-	Water loop / Ground water / Ground loop	
	DHW, Heating and Pool heating	-	■	■
	External passive cooling control	-	■	■
	Integrated active cooling	-	-	■
PERFORMANCE	Compressor modulation range	%	25 - 100	
	<sup>(2)</sup> Full load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	392.9 (4.57) / 313.5 (3.86) / 252.8 (3.48)	
	<sup>(2)</sup> Part load heating capacity (COP) - Water loop / Ground water / Ground Loop	mBTUh (-)	172 (5.65) / 134.6 (4.41) / 104.4 (3.93)	
	<sup>(2)</sup> Full load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	226.1 (11.52) / 275.5 (16.26) / 256.6 (12.54)	
	<sup>(2)</sup> Part load cooling capacity (EER) - Water loop / Ground water / Ground Loop	mBTUh (-)	99 (14.9) / 112.1 (28.99) / 107.9 (22.47)	
	<sup>(3)</sup> Max. DHW outlet temperature without / with support	°F	140 / 176	
OPERATION LIMITS	<sup>(4)</sup> Noise power level (LWA)	dB (A)	72	
	Distribution / Set heating outlet temperature range	°F	50 - 140 / 68 - 140	
	Distribution / Set cooling outlet temperature range	°F	-	41 - 95 / 45 - 95
	Source temperature range in heating / cooling mode	°F	-4 - 95 / 50 - 140	
	Minimum / Maximum refrigerant circuit pressure	psi	29.0 / 652.7	
WORKING FLUIDS	Source / Load circuit pressure range	psi	7.3 - 145.0 / 7.3 - 145.0	
	R454B refrigerant load (GWP: 466)	Oz (kg)	289.2 (8.2)	
	Compressor oil type / load	Oz (kg)	POE 160SZ / 236.3 (6.7) - 271.6 (7.7)	
	Source flow rate - Water loop / Ground water / Ground Loop	gpm	69.0 / 52.2 / 40.1	
	Load flow rate - Water loop / Ground water / Ground Loop	gpm	87.3 / 69.7 / 56.2	
CONTROL ELECTRICAL DATA	<sup>(6)</sup> 1/N/PE 230 V / 50-60 Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C1A	
	Transformer primary circuit fuse	A	0.63	
	Transformer secondary circuit fuse	A	4.0	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION - 400Vac	<sup>(6)</sup> 3/PE 380-480V / 50-60Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C63A	
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	19.8 / 30.9	
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	26.0 / 40.7	
	Maximum consumption	kW / A	30.0 / 55.0	
	<sup>(6)</sup> Minimum / Maximum starting current	A	7.2 / 25.1	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION - 575Vac	Correction of cos Ø	-	0.96 / 1	
	<sup>(6)</sup> 3/PE 525-600V / 50-60Hz	-	■	
	<sup>(7)</sup> Recommended external protection	-	C63A	
	Maximum consumption (Source EFT=32°F, Load EFT=95°F)	kW / A	13.9 / 15.1	
	Maximum consumption (Source EFT=32°F, Load EFT=131°F)	kW / A	19.3 / 21.0	
	Maximum consumption	kW / A	37.0 / 49.0	
DIMENSIONS & WEIGHT	<sup>(6)</sup> Minimum / Maximum starting current	A	4.9 / 16.7	
	Correction of cos Ø	-	0.96 / 1	
	Height x width x depth	inch	42.3 x 39.7 x 36.1	
	Empty weight (without packaging)	lb	992.1	1025.1


- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- Performance data referred to AHRI operating conditions.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp.
- In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.

## Dimensions and hydraulic connections

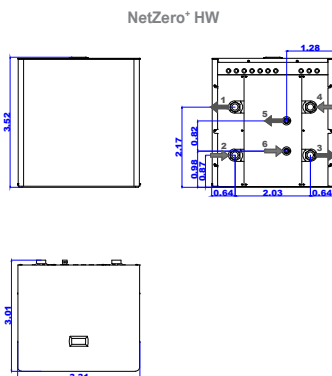


- Load outlet 2 ½" M
- Load inlet 2 ½" M
- Source outlet 2 ½" M
- Source inlet 2 ½" M
- HTR outlet 1 ½" M
- HTR inlet 1 ½" M


## Pressure drop

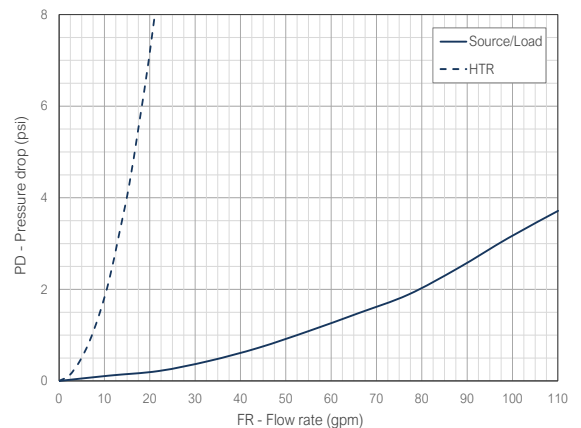


### Operational chart

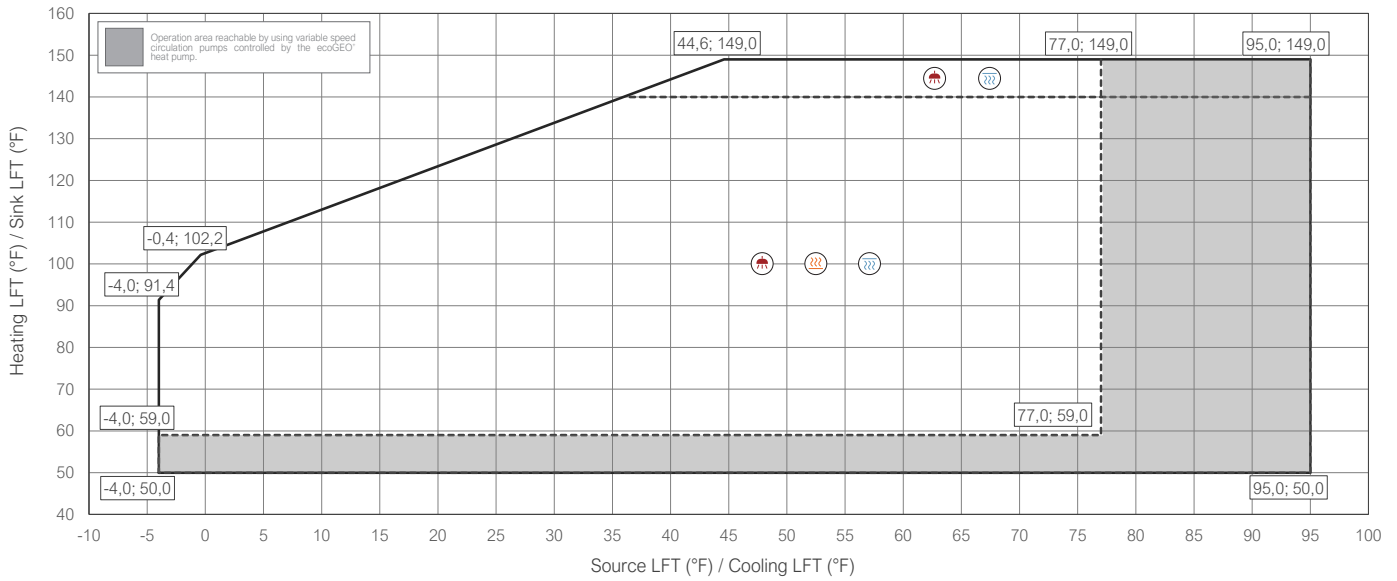

### Heating capacity - Source EFT

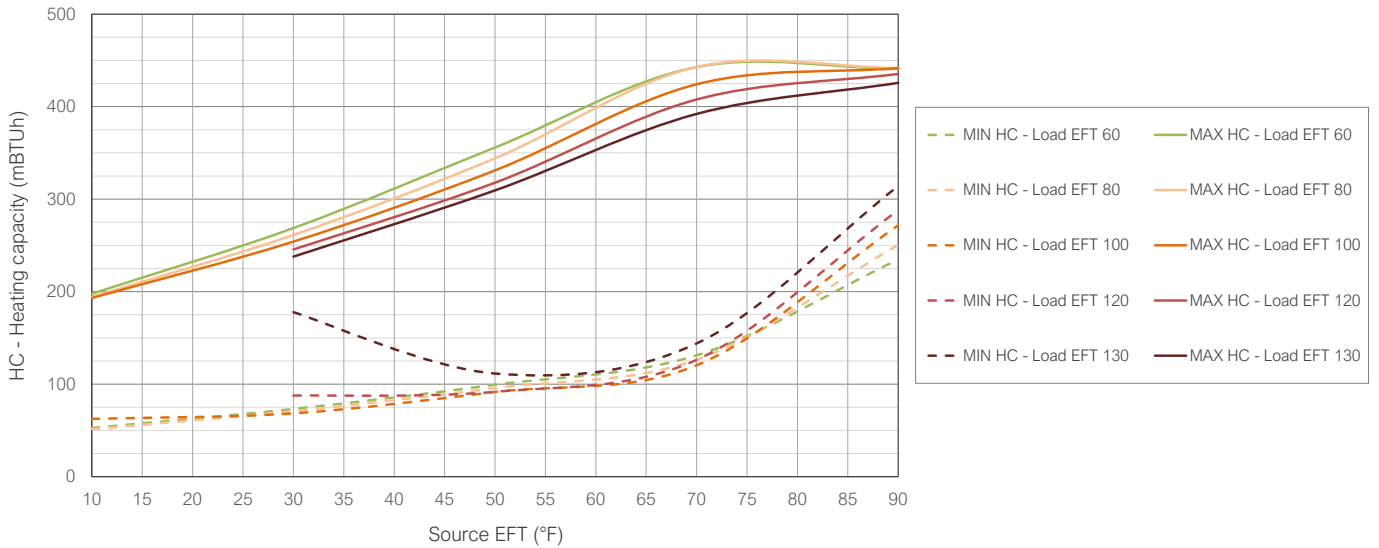

### Cooling capacity - Source EFT

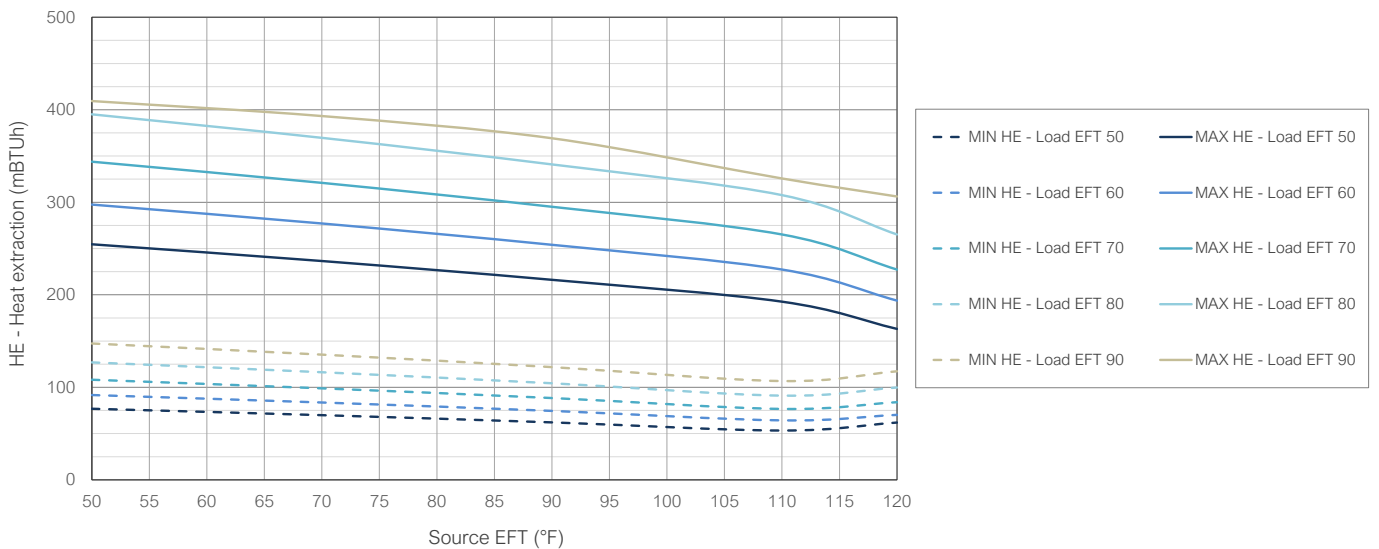





# Glossary

## Abbreviation Description

### Units

<i>lb</i>	Pound.
<i>inch</i>	Inch (").
<i>Oz</i>	Ounce.
<i>GPM</i>	Galons Per Minute.
<i>PSI</i>	Pounds per Square Inch.
<i>BTUh</i>	British Thermal Unit per hour.
<i>mBTUh</i>	1000 British Thermal Unit per hour.
<i>W</i>	Watt.
<i>kW</i>	KiloWatt (1000 W).

### Properties

<i>SPEED</i>	Compressor speed (%).
<i>EFT</i>	Entering fluid temperature (°F).
<i>LFT</i>	Leaving fluid temperature (°F).
<i>FR</i>	Flow Rate (GPM).
<i>PD</i>	Pressure Drop (PSI).
<i>APD</i>	Available Pressure Drop (PSI), meaning the affordable pressure drop for units including circulating pumps.
<i>HE</i>	Heat Extraction (mBTUh), meaning heat source capacity in heating mode and cooling capacity in cooling mode.
<i>P</i>	Electrical Power input (kW).
<i>HC</i>	Heating Capacity (mBTUh), meaning heating capacity in heating mode and heat sink capacity in cooling mode.
<i>COP</i>	Coefficient Of Performance used to measure heating efficiency (BTUh output / BTUh input).
<i>EER</i>	Energy Efficiency Ratio used to measure cooling efficiency (BTUh output / W input).

### Terms

<i>Source</i>	Primary circuit of the heat pump, meaning heat source in heating mode and heat sink in cooling mode.
<i>Load</i>	Secondary circuit of the heat pump, meaning heat sink in heating mode and heat source in cooling mode.
<i>HTR</i>	High Temperature Recovery de-superheater system. Option available in all models. HTR allows simultaneous heating and DHW / pool heating production in heating mode, and simultaneous cooling and DHW / pool heating production in cooling mode.
<i>Inverter</i>	Fully modulating variable compressor speed technology. This continuous (non-step) modulation allows the heat pump to adapt the heating/cooling power output to the building's current heating/cooling load optimising efficiency.








**GeoSmart Energy**

1-650 Jamieson Parkway, Cambridge, ON  
N3C 0A5 (Canada)

T: +1 866 310 6690 | P: +51 962 404 00 | F: +1 866 533 3889

[info@geosmartenergy.com](mailto:info@geosmartenergy.com)

[www.geosmartenergy.com](http://www.geosmartenergy.com)



v2026\_01



GeoSmart Energy shall not be held responsible for any error contained in this these technical data sheets and reserves the right to make any modifications it deems necessary for both technical and commercial reasons at any time and without prior notification. The availability of any equipment described in this document shall always be confirmed by GeoSmart Energy. The inclusion of the equipment in this catalogue does not imply an immediate availability.

**GEOSMART**  
**NETZERO<sup>+</sup>**